


## ADDENDUM


This addendum replaces page 8 of your  
FNX Component Systems Operation & Installation Manual

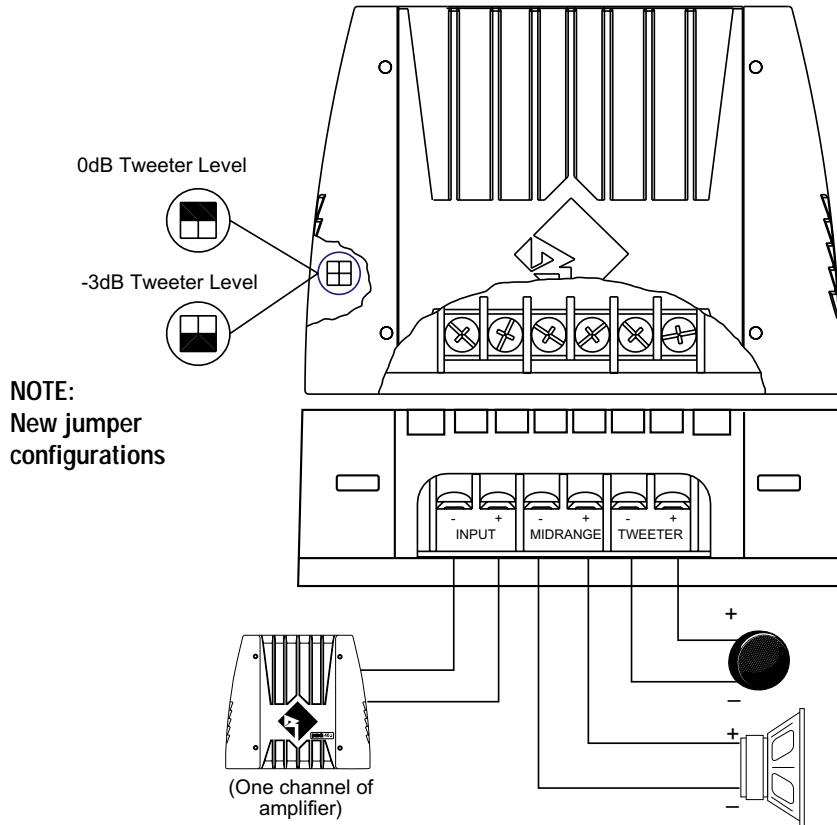

- Be sure to maintain speaker polarity
- 0dB Tweeter Level matches the amplitude of the tweeter to the midrange
- -3dB Tweeter Level reduces the amplitude of the tweeter -3dB lower than the midrange. (ex. Ideal for tweeters located high in door panels and midranges located low in the kick panel.)

## ADDENDUM

This addendum replaces page 8 of your  
FNX Component Systems Operation & Installation Manual

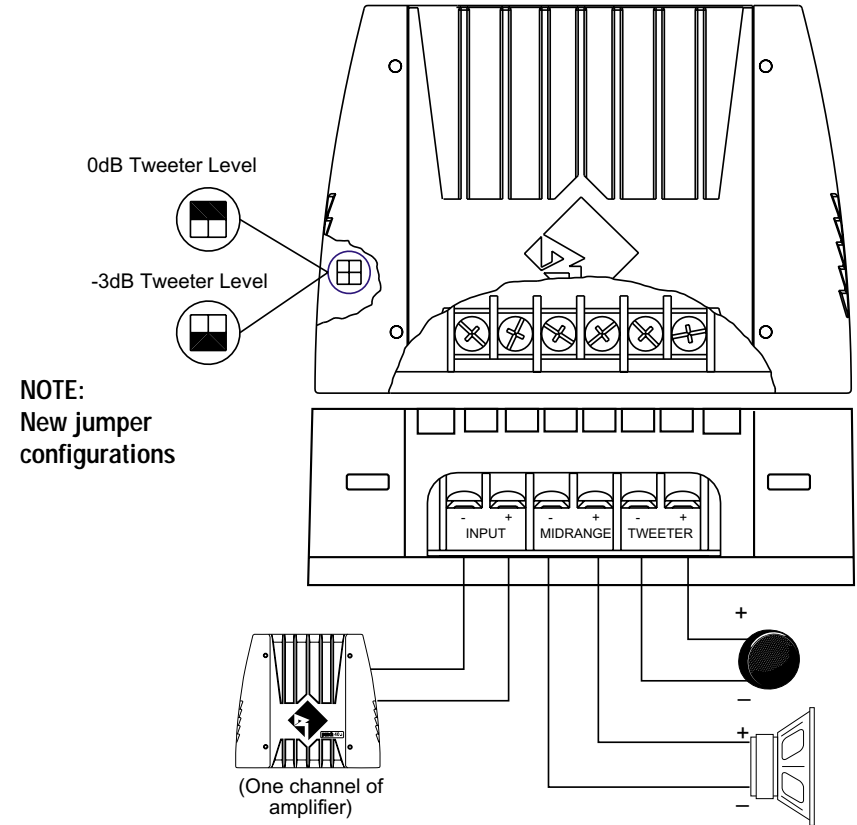

- Be sure to maintain speaker polarity
- 0dB Tweeter Level matches the amplitude of the tweeter to the midrange
- -3dB Tweeter Level reduces the amplitude of the tweeter -3dB lower than the midrange. (ex. Ideal for tweeters located high in door panels and midranges located low in the kick panel.)