
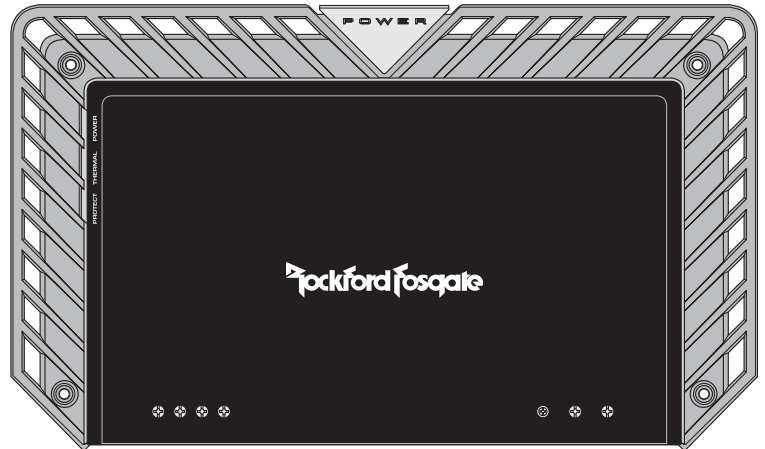


Jockford Fosgate®

Product Advisory

2004 – 2007 PUNCH and POWER Amplifier input connection from source units with only High Level (Speaker Line) outputs.

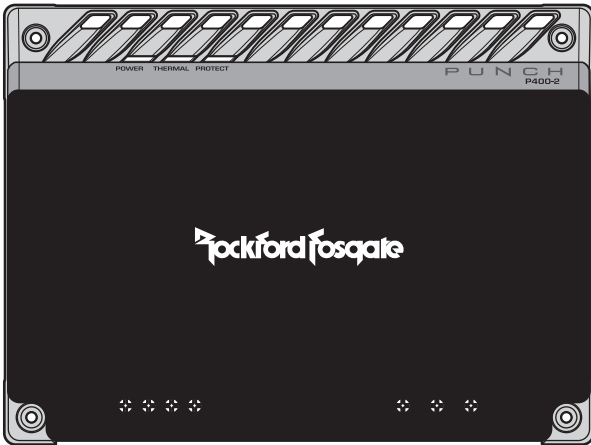

Connect the positive (+) speaker line to the core wire (center pin) of the RCA cable.

Connect the ground (-) shield wire (outer grip) of the RCA cable to the chassis on the radio (source unit).

DO NOT connect the negative (-) speaker line to the ground (-) shield wire of the RCA cable.



CAUTION: Connecting the negative (-) speaker line to the ground (-) shield wire of the RCA cable may cause damage to the radio (source unit) and/or amplifier and void your warranty.

Vehicle OEM Source Unit

